



MULTIFIT PLEATED BAG CARTRIDGE

OPEN/CLOSED

TYPE CMF
version MULTIFIT

CLEAN SIDE REMOVAL


- > Filter cartridge for dust applications
- > Can be equipped with Nordic Air Filtration's media selection. See our separate filter media guide
- > Gasket/adaptor according to application: EPDM or Silicone
- > Inner mesh according to application
- > Top and bottom cap: PA6
- > Optional: Electrostatic conductive enhancement for ATEX environment

PART NUMBER

Example:

CMF XXX XXXX XXX XX W

cartridge type	└─┘
number/diameter of flange. mm	└─┘
height of filter. mm	└─┘
type of filter media	└─┘
filter media area. mm	└─┘
technology notes (optional)	└─┘

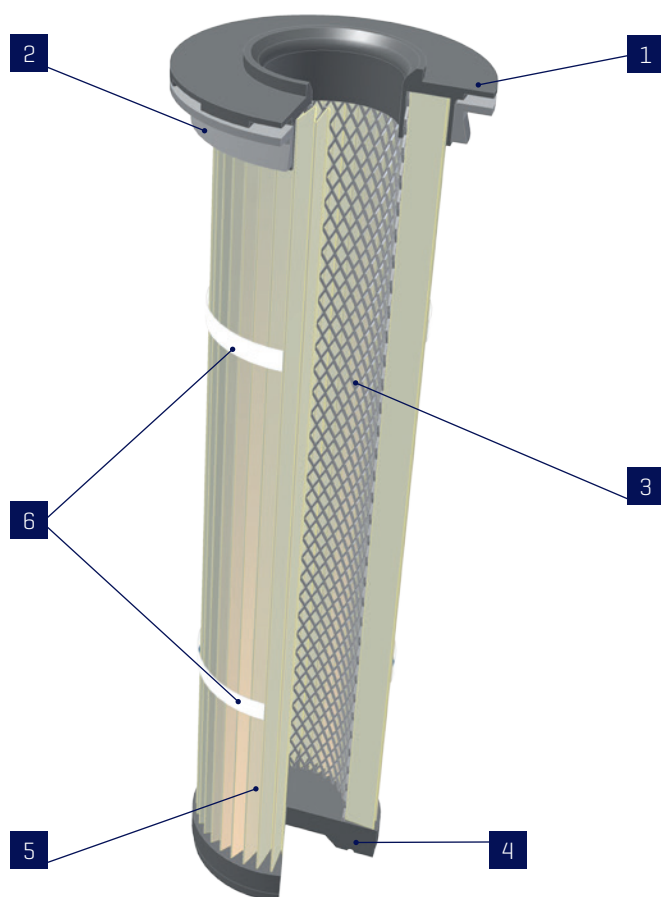

- TOP CAP**
PA6 - Polyamide
- ADAPTOR**
Standard: EPDM
Alternative: silicone
- INNER MESH**
Standard: Galvanized steel
Alternative: Polypropylene PP spiro
- CLOSED BOTTOM CAP**
PA6 - Polyamide
- FILTER MEDIA**
Can be equipped with Nordic Air Filtration's filter media selection.
- OUTSIDE STRAP**
Optional: Glued or Weltech Strap





MULTIFIT PLEATED BAG CARTRIDGE

OPEN/CLOSED

TYPE CMF
version MULTIFIT


DESIGN & DIMENSIONS



Several adaptor ring sizes enable easy installation in hole plates with the following dimensions:

mm	inches
152	6.00
154	6.06
157	6.20
158	6.25
160	6.31
163	6.42
165	6.50
167	6.60

CARTRIDGE

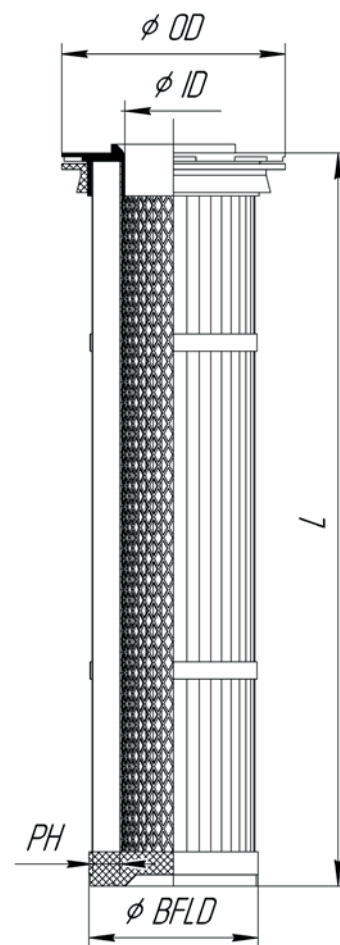

Specifications

Standard dimensions

CMF145

		mm	inches
Top cap outer diameter	OD	180	7.09
Top cap collar outer diameter		147	5.79
Top cap inner diameter	ID	86	3.39
Pleat height	PH	22 or 24	0.87 or 0.94
Bottom cap outer diameter	BFLD	145	5.71
Adaptor ring for installation in hole plates ranges		From: 152 - 167 mm / 5.98 - 6.57 inches diameter	
Cartridge length	L	From: 300 to 2000 mm / 11.88 to 78.74 inches	

Customized dimensions available. Please contact sales at sales@nordic-air-filtration.com



NORDIC AIR FILTRATION
Member of the Hengst Group

sales@nordic-air-filtration.com
www.nordic-air-filtration.com